

LOGICA MICRO LP



	Technical Specifications
operation	Electrical with numerical control
printing force	1500 N
Nº of colors	1-2-3-4
max printing speed	Adjustable up to 3600 c/h
max. pad height	100 mm
max. printing diameter	1 color - 110mm 2 color - 80mm
max. cliché size	125-250
max. cup size (hermetic configuration)	1 color - 115mm 2 color - 90mm
AC supply	220-240 V single phase 50/60 Hz
average consumption	400W
weight	About 260 kg

Options

- Trolley Bench with adjustable height work table or automation installation kit
- Numerous part conveying accessories
- Programmable automatic pad cleaner
- Pad shuttle devices
- Pad and Part Drying
- Photo polymer and steel plate making device
- Non-magnetic plates



240 Smith Street • Lowell, MA 01851 (978) 459-6533 sales@padprinters.com

Standard Configurations

1 Color Hermetic System

- 1 hermetic cup with blading ring type CR 115
- 1 support for nr.1 plate size 125x250x10mm
- 1 non-magnetic plate 125x250x10mm
- 1 slide pad-holder group with 2 bases
- 1 bench with item holder support (adjustable height)

2 Color Hermetic System

- 2 hermetic cups with blading ring type CR 115
- 1 support with nr.2 non magnetic plates size 125x250x10mm (pitch 152,4mm) adjustable on x,y,r axes
- 2 slide pad-holder groups with 2 bases
- 1 bench with item holder support (adjustable height)

3 Color Hermetic System

- 3 hermetic cups with blading ring type CR 86
- 1 support with nr.3 non-magnetic plates size 100x250x10mm (pitch 114,3mm) adjustable on x,y,r axes
- 3 slide pad-holder groups with 3 bases
- 1 bench with item holder support (adjustable height)


4 Color Hermetic System

- 4 hermetic cups with blading ring type CR 86
- 1 support with nr.4 non-magnetic plates size 100x250x10mm (pitch 114,3mm) adjustable on x,y,r axes
- 4 slide pad-holder groups with 4 bases
- 1 bench with item holder support (adjustable height)




240 Smith Street • Lowell, MA 01851 (978) 459-6533 sales@padprinters.com

LOGICA MICRO LP

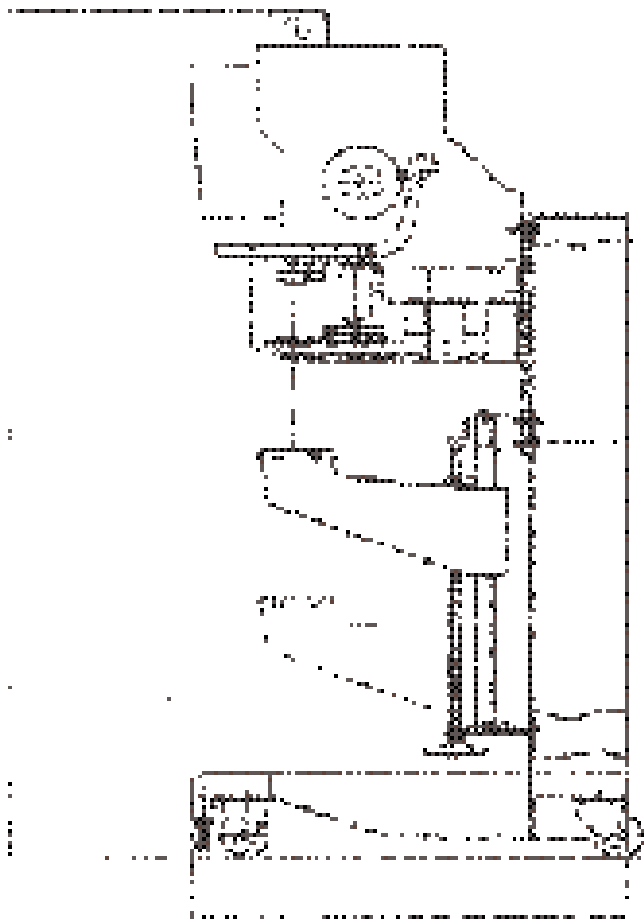

side view

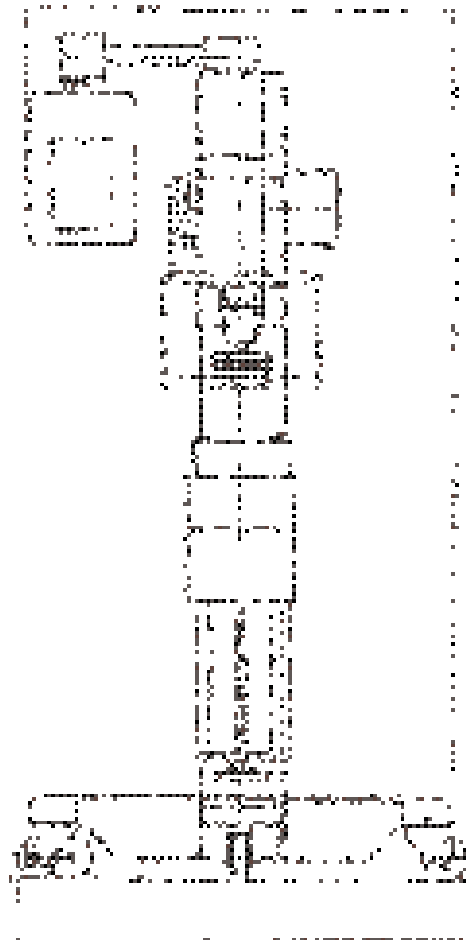

top view